


TECHNICAL TAILS:

- 1) ALL DIMENSIONS ARE IN mm.
- 2) GENERAL TOLERANCES : ±3%.
- 3) ALL FERROUS PARTS HOT DIP GALVANISED & SPRING WASHER ELECTRO GALVANISED AS PER POWERGRID SPECIFICATION.
- 4) ALL DIMENSIONS ARE AFTER GALVANISATION EXCEPT DRILLED HOLES.
- 5) HARDWARE TOLERANCES ON LENGTH ±2%.



**POWER GRID CORPORATION
OF INDIA LIMITED**
(A GOVERNMENT OF INDIA ENTERPRISE)

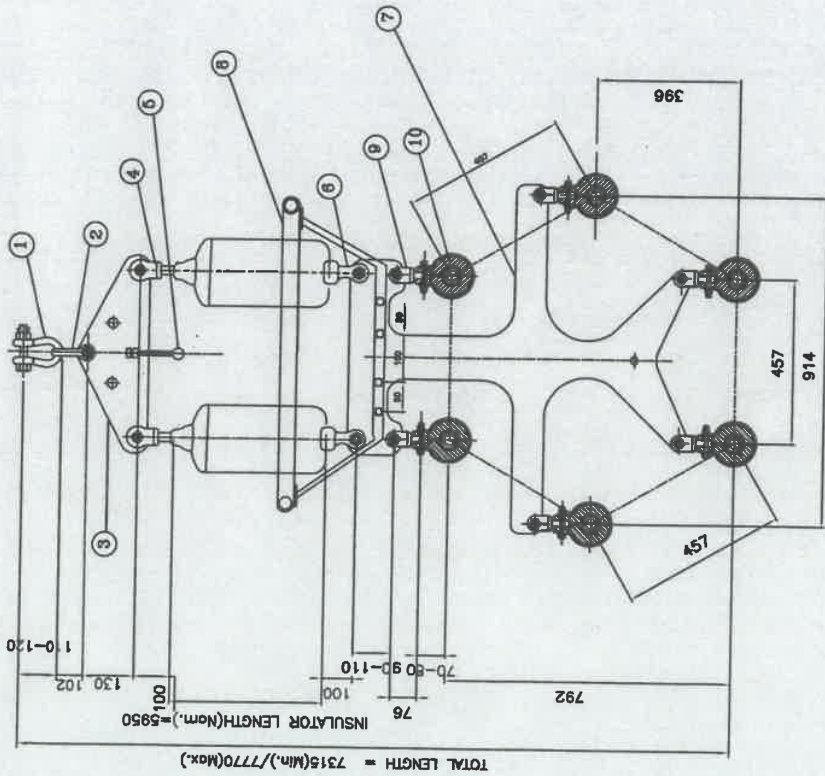

TITLE:- 765 KV D/C (HEXA ZEBRA) DOUBLE "I" SUSPENSION STRING
FOR SIX BUNDLE "ZEBRA" ACSR CONDUCTOR
UTS-350 KN

CLEARED BY

SR. GM (ENGG-TL) [Signature]
CGM (ENGG-TL) [Signature]
ED (ENGG) [Signature]
CH. MGR (ENGG-TL) [Signature]
MGR. (ENGG-TL) [Signature]
DATE 14.11.19

DRG. NO. :- CC:ENGG:TL/HW/765 KV/HEXA/DIS

Sr. No.	DESCRIPTION	PART NDI.	UTS	QTY.	REF
10	SUSPENSION CLAMP(AGS)	AGS-ZEBRA	70 KN	6	AGS-001
9	CLEVIS EYE	CE-90-01 / CE-70-01	90/70 KN	6	CE-001
8	CORONA RING	CR-765-02	----	1	CR-001
7	YOKE PLATE	YP-C-H-350-01	350 KN	1	YP-C-H-001
6	SOCKET CLEVIS	SC-175-01	175 KN	2	SC-001
5	ARCING HORN	AH-BL-02C	----	2	AHB-001
4	BALL CLEVIS	BC-175-01A / BC-175-01B	175 KN	2	BC-001
3	YOKE PLATE	YP-TR-350-02	350 KN	1	YP-TR-001
2	ANCHOR SHACKLE	AS-350-02	350 KN	1	AS-001
1	ANCHOR SHACKLE	AS-350-01	350 KN	1	AS-001
	DESCRIPTION	PART NDI.	UTS	QTY.	REF